


4500D - MARINE GEARBOX

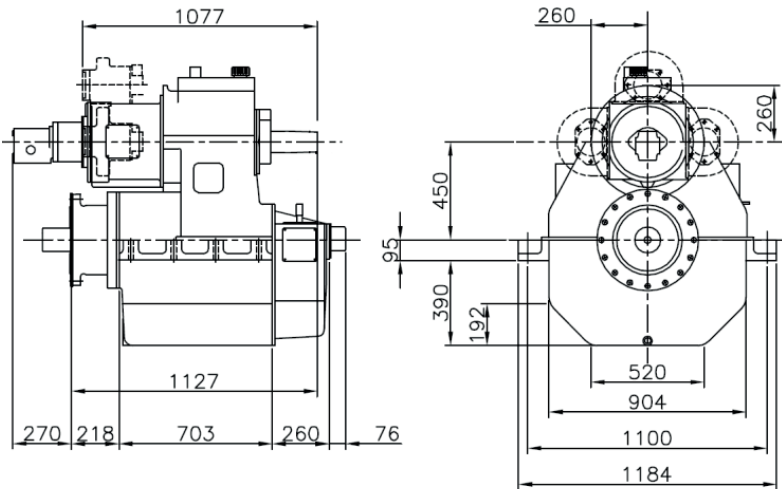

Reduction Ratio	Power Factor kW/RPM	Input Shaft Diameter mm
3,11-3,58:1	1,500	100
4,18-4,44:1	1,120	100
5,11:1	0,972	80
5,47:1	0,889	80
5,94:1	0,773	80
6,47:1	0,670	80

PTO:

PTO with SAE D-flange and 13 tooth 1 3/4" involute inside spline

Other SAE and ISO flanges and splines available

Free shaft end also available

Max torque from PTO: 2000 Nm

Weight:


Approx. 2350 kg plus approx. 70 kg per PTO

Gearbox:

- Prepared for OD system
- Compact design
- Large economical reduction ratio
- Option of 1, 2 or 3 PTOs each with own hydraulic clutch
- Rigid cast iron housing
- Helical ground gearwheels in casehardened and highly alloyed steel
- Hydraulic multi-plate clutch
- Oil system with direct driven oil pump, cooler, filter, valves etc.
- Pressure lubricated spherical roller bearings
- Designed according to the rules of the classification societies
- Each gearbox is tested and approved in test bed

Variants:

450HS with built-in servo system for CP propeller

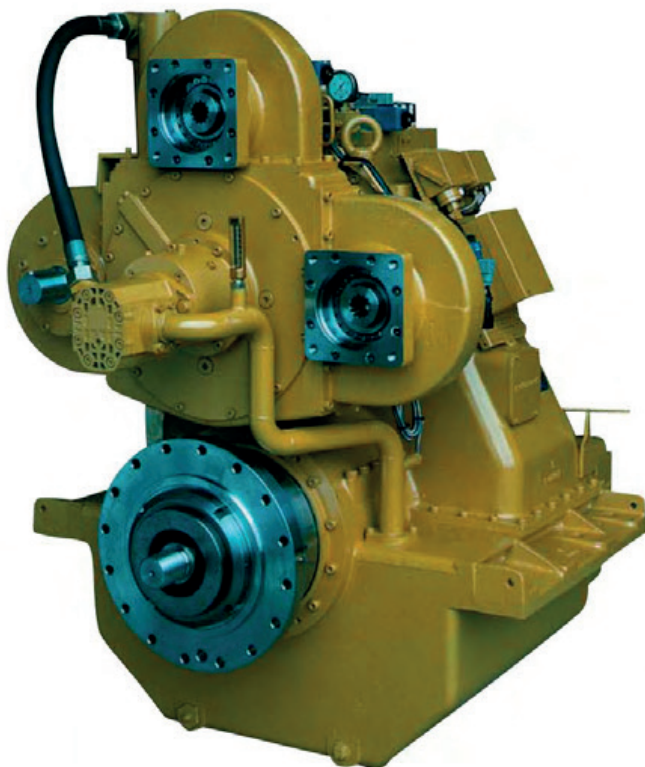

Manufacturer of **mekanord** gearboxes

For further details and additional information,
please contact our technical sales organization

sales@meproduction.dk



MEPRODUCTION
EFFICIENCY THROUGH SIMPLICITY